


INSTALLATION INSTRUCTIONS

(Rubber Floor Underlayment)

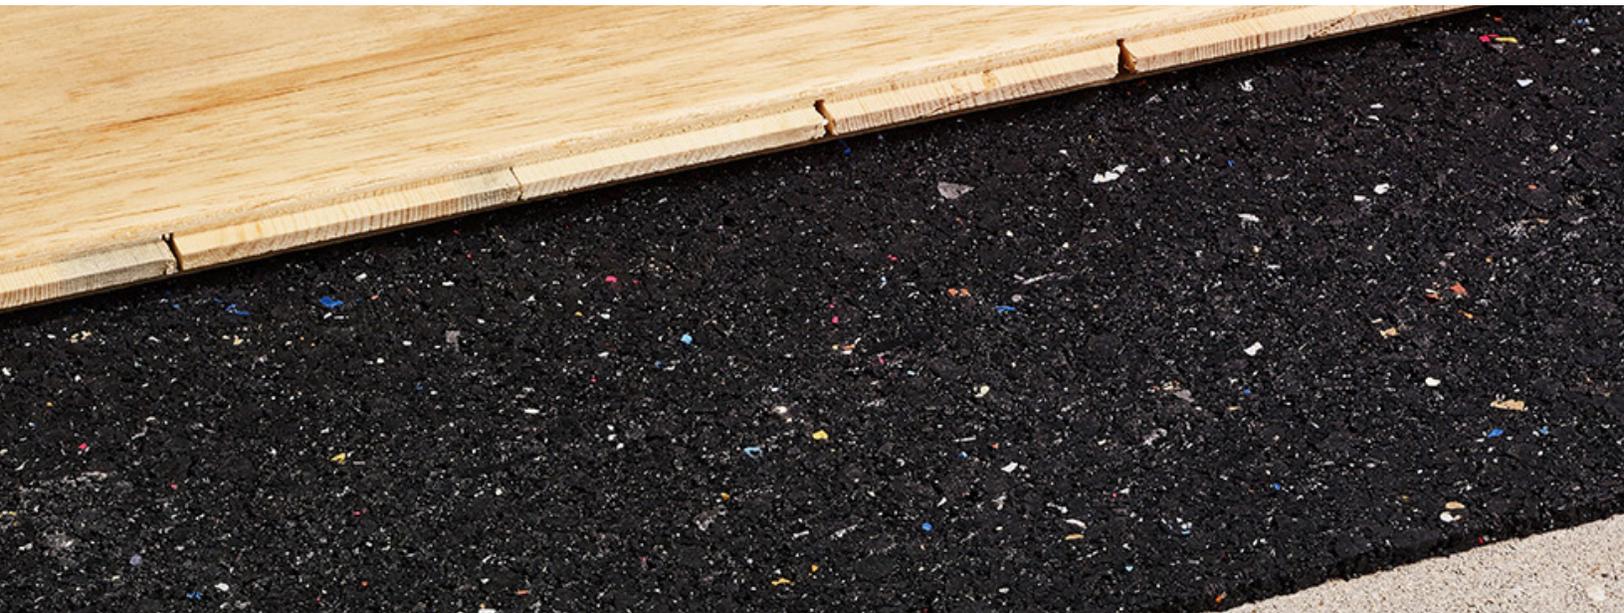

SUGGESTED TOOL LIST:

- Standard tape measure
- Utility Knife
- Metal straight edge or Drywall T-square

I. JOB SITE CONDITIONS & SUBFLOOR

- A The area to receive the underlayment flooring should be weathertight and maintained at room temperature 68° F (20° C) before, during, and after the installation.
- B Underlayments are intended for indoor use only and should not be installed in areas where the temperatures are not maintained at a uniform rate of 68°.
- C Acceptable subfloors for underlayments are: any wood, laminate or concrete surface, or existing resilient flooring.
- D Subfloors should be smooth and level to a +/- 1/8" in a 10' radius.

II. STORAGE & HANDLING

- A Store the underlayment material in its original, unopened packaging with all labels intact.
- B Inspect all materials for visual defects before beginning the installation. Verify the material delivered is the correct style, and amount. Any discrepancies must be reported to the retailer where the material was purchased.
- C Remove from packaging and allow them to sit in the area to be installed. Tiles must be acclimated at uniform room temperature for a minimum of 24 hours before installation.
- D Ensure the job site and subfloor conditions are met.

ACCEPTABLE FLOORS

Engineered hardwood, click laminate, hybrid click LVT, carpet & carpet tiles, rubber flooring, cork flooring

NON-ACCEPTABLE FLOORS

Glue down vinyl, VCT

NOTE: Installation of ceramic tile flooring over rubber floor underlayment should be done by a certified tile installer to avoid cracking of tiles or grout lines.

INSTALLATION

- 1 Allow rubber underlayment to acclimate to room temperature for 24-48 hrs.
- 2 Roll out rubber underlayment and cut flush to wall edges.
- 3 Install additional rows to cover total room.
- 4 Make sure that long edge joints are tightly fitted against each other.
- 5 Install loose lay flooring on top of rubber floor underlayment.

NOTE: Any questions during installation please call us at 800-279-1693



Rubber Flooring Direct

Corporate Office: Lancaster, PA

Shipping Warehouses in California and Pennsylvania

1 800-279-1693 | sales@rubberflooringdirect.com